


lino exposed wall-mounted faucet W45, 200 mm, chrome, battery, with thermostat, with touch-free start/stop function

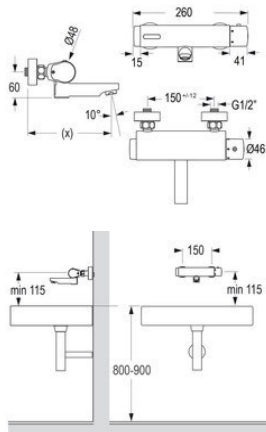

Electronically controlled shower faucet for concealed installation with touch-free start/stop function (close detection)

sturdy version: valve body DZR-brass

Spout fixed

dual infrared sensors with automatic setting feature, microprocessor-electronic reliable solenoid valve (minimal level of water pressure surge)

temperature adjustable with thermostat-cartridge

with anti-scalding and auto-thermic protection

temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Touch

continuous water flow time adjustable with Touch

follow-up time and sensor sensitivity adjustable with Touch

12, 24 or 48-hour hygienic rinse activatable with Touch

incl. s-connectors 3/4" and rosettes (lockable s-connector optional)

spout (x): 200 mm

colour: chrome

power supply: battery, 6V Lithium CRP 2 (standard: life time up to 4 years)

mixture: with thermostat

use: with touch-free start/stop function

Operating pressure: 0,3 - 10 bar

Flow rate: approx. 5 l/Min. (3 bar)

Max. water temperature: 80° C

Aerator: economy aerator, cascade (self-cleaning)

Filter: 0,5 mm mesh size

Follow-up time: 7 sec. pre-set (adjustable with function key 1 - 30 sec.)

Continuous water flow and

hygienic rinse time: 2 min. pre-set (adjustable with function key 0,5 - 20 min.)

Temporary-off: 2 min. (fixed);

Engineering standards: DIN EN 200;CE